



ISO8528	GC ;) &
SZUTEST	GC - \$\$\$
CE	

2000/14/EC & \$\$\$#(#

	"	"	"	"	Amp
400/230		24,00		21,00	

Standard Specifications

ALTERNATOR


TRANSFER SWITCH

Manufacturer	John Deere		
Model	3029 D		
	1500 d/dk		
	' % "Q &<DQ		
	L	2,90	
	"	106 X 110	
		17,8:1	
	fl # ı	"# "	1500
	fl "ı	L	6,00
		L	12,00
AbsorbedAirDischargeReSourceKey.Text	' # "	1,70	
fl ' # "ı	' # "	5	
	° C	555	
		12 V d.c.	
	Load	%"\$ı	'+)ı
	# ")\$ı	
		7,00	5,00 3,60

	Mecc Alte		
	ECO 28-VL/4		
	Hz	50	
	"	30	
7 cg'		0,80	
		1	
	fl ı	230	
	A	43	
Temperatur		H	
		&#' UXia	

		fl "ı		fl "ı	
	"	"	"	"	L
AJD 24M	720	880	1600	1300	110
		fl "ı		fl "ı	
	"	"	"	"	L
ASM 3	980	2120	920	1480	110

1 D+&'

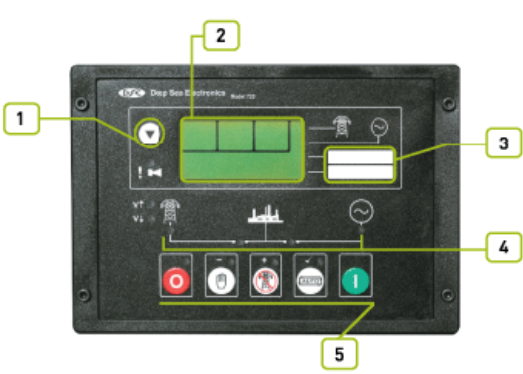

- 1
- 2
- 3
- 4
- 4

2

8G9ž +&\$ž) 5ž&&\$#(\$

3

4

5

8G9'+&\$ 8G9'+&\$ ž fl

8G9'+&\$ ž fl

fl ž fl %\$\$

ž ž ž ž

f@BŁ
f@%&@Ł
f@%&@BŁ

#

#

6G'9B *\$-\$) \$
6G'9B *%\$\$!*&
6G'9B *%\$\$!*(

GA 8

!%& "

%, !&* \$

%)

ž


ž

ž

AJD 24M

John Deere
Mecc Alte
D+&T

5GA " !'

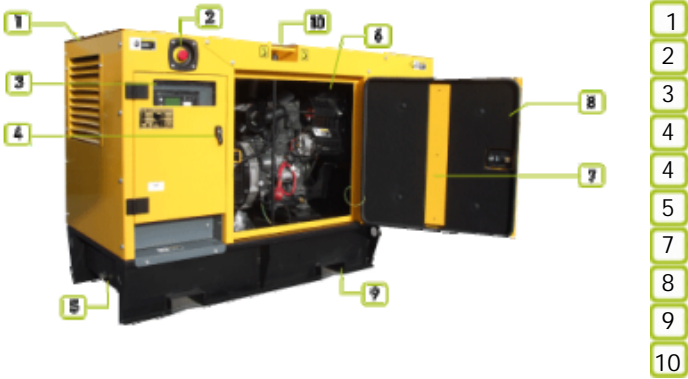

Technical specifications and descriptions for the generator, including details on power output, efficiency, and maintenance requirements. The text is partially obscured by noise and artifacts.

	"	920
fl "7	"	2120
fl "7	"	1480
		110