

AMT 16

Mitsubishi
Stamford
D+&



ISO8528	GC ;) &
SZUTEST	GC - \$\$\$
CE	

2000/14/EC

&\$\$\$#(#

z) \$ z'z' D:

	"	"	"	"	Amp
400/230	16,00	12,80	14,50	11,60	20,00

Standard Specifications

(*# \$S

fl ! E

z

z

ALTERNATOR

fl " E

TRANSFER SWITCH

AMT 16


Mitsubishi
Stamford
D+&''

Manufacturer		Mitsubishi
Model		S4L2
		% \$\$ "# "
		% "Q\$< DQ
	L	1758,00
	"	78 x 92
		22:1
	fl # t	"# " 1500
	fl t	L 6,00
		L 7,50
		12 V d.c.
	Load	%\$ \$i
	# "	
		4,00

		Stamford
		PI 044G
	Hz	50
	"	15
7cg		0,80
		3
	fl t	400/230
	A	21

		fl t		fl t	
	"	"	"	"	L
AMT 16	410	1370	850	1000	50
		fl t		fl t	
	"	"	"	"	L
AK 10	585	1850	860	1140	50

D+&''

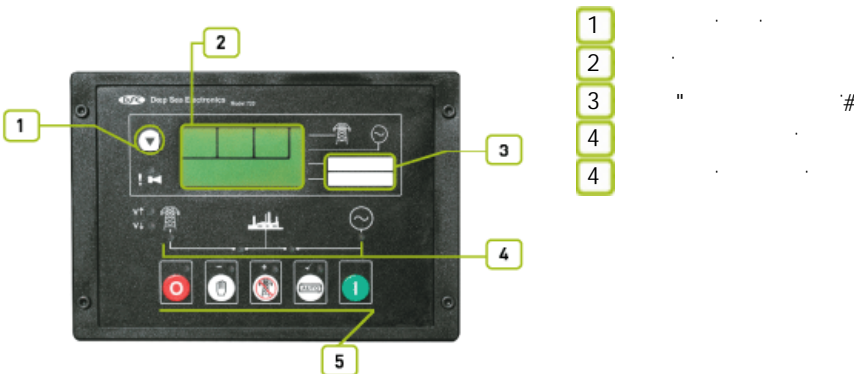

AMT 16

Mitsubishi
Stamford
D+&''



- 1 8G9ž +&\$ž) 5ž&&\$#&(\$
- 2
- 3
- 4 8G9'+&\$ 8G9'+&\$ ž fl
&)' ž
'8G9'+&\$ ž "
- 5 fl ž ž ž ž ž " ž fl %&\$
ž
ž ž ž ž ž

AMT 16

Mitsubishi
Stamford
D+&''



f@BŁ
f@%&@Ł
f@%&@BŁ

#

#

6G'9B *\$-\$) \$
6G'9B *%\$\$!*&
6G'9B *%\$\$!*(

GA 8

!%& "

%, !&* \$

%)

ž

ž

ž

ž

