

AGM 80

GM
Mecc Alte
D+ &



ISO8528

GC,) &

SZUTEST

GC - \$\$\$

CE

2000/14/EC

&\$\$#/(#

! ž \$ < nž7 cg 1 \$ž

	"	"	"	"	
400/230	82.00	65.00	72.00	58.00	104.00

fP GDŁ

GC,) &

fDF DŁ

GC,) & ž

%\$!

%

%&

ž& GC " \$(**

Standart Specification

- Heavy duty, water cooled naturalgas engine
- 46/50 °C ambient rated radiator with mechanical fan
- Protective grille for fan and rotating parts
- Electric starter and charge alternator
- Starting battery (with lead acid) including rack and cables
- Engine jacket cooling heater
- Base frame design incorporates an integral fuel tank and anti-vibration isolators
- Flexible fuel connection hoses
- Single bearing, class H alternator
- Industrial exhaust silencer and steel belows supplied separately
- Static battery charger
- Manual for use and installation

1

ENGINE

!

ALTERNATOR

!

WISE ACCESSORIES

!

CONTROL SYSTEM

!

AGM 80

GM
Mecc Alte
D+' &''

1

Manufacturer	GM	
Model	881 L	
	1500 d/dk	+ ' "\$ "Q-DQ
	L	8.1000
		108 x 111
		8,1:1
	fl # t	rpm
		1500
Fuel Consumption	m ³ /h.	24,5
Gas Pressure	mbar	35-50
Oil Capacity	L	8
Absorbed Air Discharge	m ³ /dk.	5
Disposal Air	m ³ /san	2
	m ³ /dk.	12
	mm - ss	1200
	° C	491
Emitted Heat	"	15

2

Manufacturer	Mecc Alte	
	ECO 34-1S	
	"	85
Cos fi	1	
	3	
	400/230	
5_ia	A	122


3

	"	"	"	"
	1150	2200	1100	1300
	"	"	"	"
	1620	3110	1060	1750

AGM 80

GM
Mecc Alte
D+ &

● D+ &

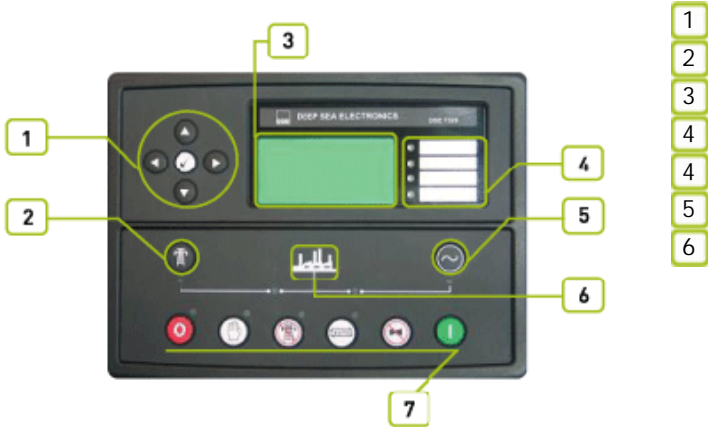

● Devices

"8G9ž + &šž) 5ž&&šž&(\$

● Structure And Paint

● Montage

● Generator Control Unit


"8G9+ &\$ ž "8G9+ &\$ "8G9+ &\$ ž

% &l '*(' žFG' &žFG(,)ž

AGM 80

GM
Mecc Alte
D+ &''

5GA)"!'

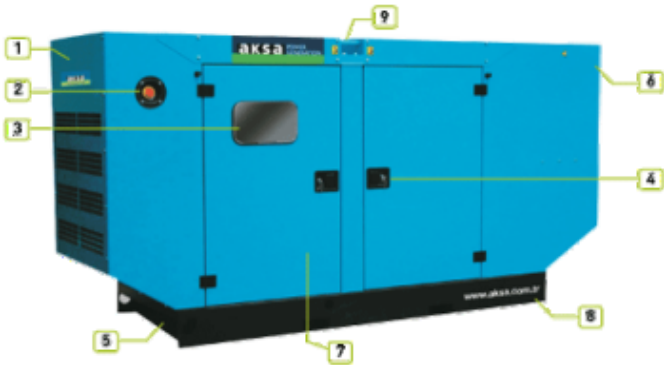

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9

1

fj !&+) 7

ž ž

1

ž ž ž ž

		ASM 5.
	mm.	1060
	mm.	3110
	mm.	1750