


Manufacturer		John Deere		
Model		4045 TF120		
	L	4,50		
	"	106 X 127		
		17.0:1		
	fl # ı	"# "	1800	
	fl "ı	L	13,20	
		L	21,00	
AbsorbedAirDischargeReSourceKey.Text	' # "	6,00		
	' # "	15,50		
	° C	527		
		12 V d.c.		
	Load	%%\$ı	'+)ı)\$ı
	# "			
		18,40	14,40	10,00

		Stamford		
		UCI 224F		
	Hz	60		
	"	78		
7 cg'		0,80		
		3		
	fl ı	480/277		
	A	117		
Temperatur		H		
		&# 'UXia		

Open Type		fl "ı		fl "ı	
	"	"	"	"	L
AJD 68-6	1050	2150	1020	1530	215
		fl "ı		fl "ı	
	"	"	"	"	L
ASM 5	1510	3110	1060	1750	215

1 D'+&'

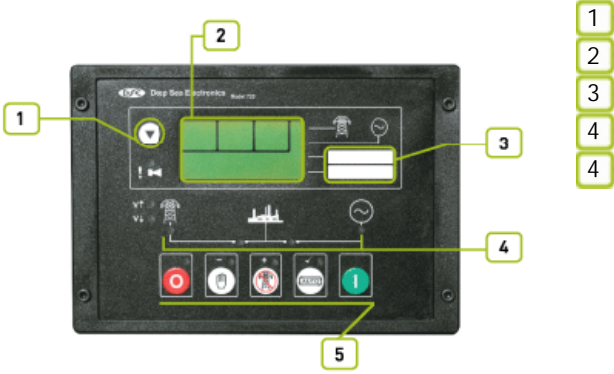

8G9ž +&\$ž) 5ž&&\$#(\$

8G9ž +&\$ž) 5ž&&\$#(\$

8G9ž +&\$ž) 5ž&&\$#(\$

8G9ž +&\$ž) 5ž&&\$#(\$

8G9ž +&\$ž) 5ž&&\$#(\$

f@BŁ
f@%&@Ł
f@%&@BŁ

#

#

6G'9B *\$-\$) \$
6G'9B *%\$\$\$!*&
6G'9B *%\$\$\$!*('

GA 8

!%& "

%, !&* \$

%)

ž

ž

ž

5GA 1



- 1
- 2
- 3
- 4
- 4
- 5
- 7
- 8
- 9

2

3

	"	1060
fl "L	"	3110
fl "L	"	1750
		215